

STANLEY®

STANLEY®

Thermal & Sound Insulation Spray Foam

Provides an unique monolithic thermal insulation without junctures, seams and gaps.

COVERS UP TO
20
BOARD
Feet / sq.ft.

- Excellent R-value; 5.66 Per Inch and thermal insulation value 0.025 W / (M.K)
- Easy to use
- Excellent adhesion
- For all building materials

THERMAL & SOUND INSULATION SPRAY FOAM


COVERS UP TO

20
BOARD
Feet / sq.ft.



Provides a unique, monolithic thermal insulation application without junctures, seams and gaps

PERFECT CHOICE FOR HIGH QUALITY THERMAL AND ACOUSTIC INSULATION!

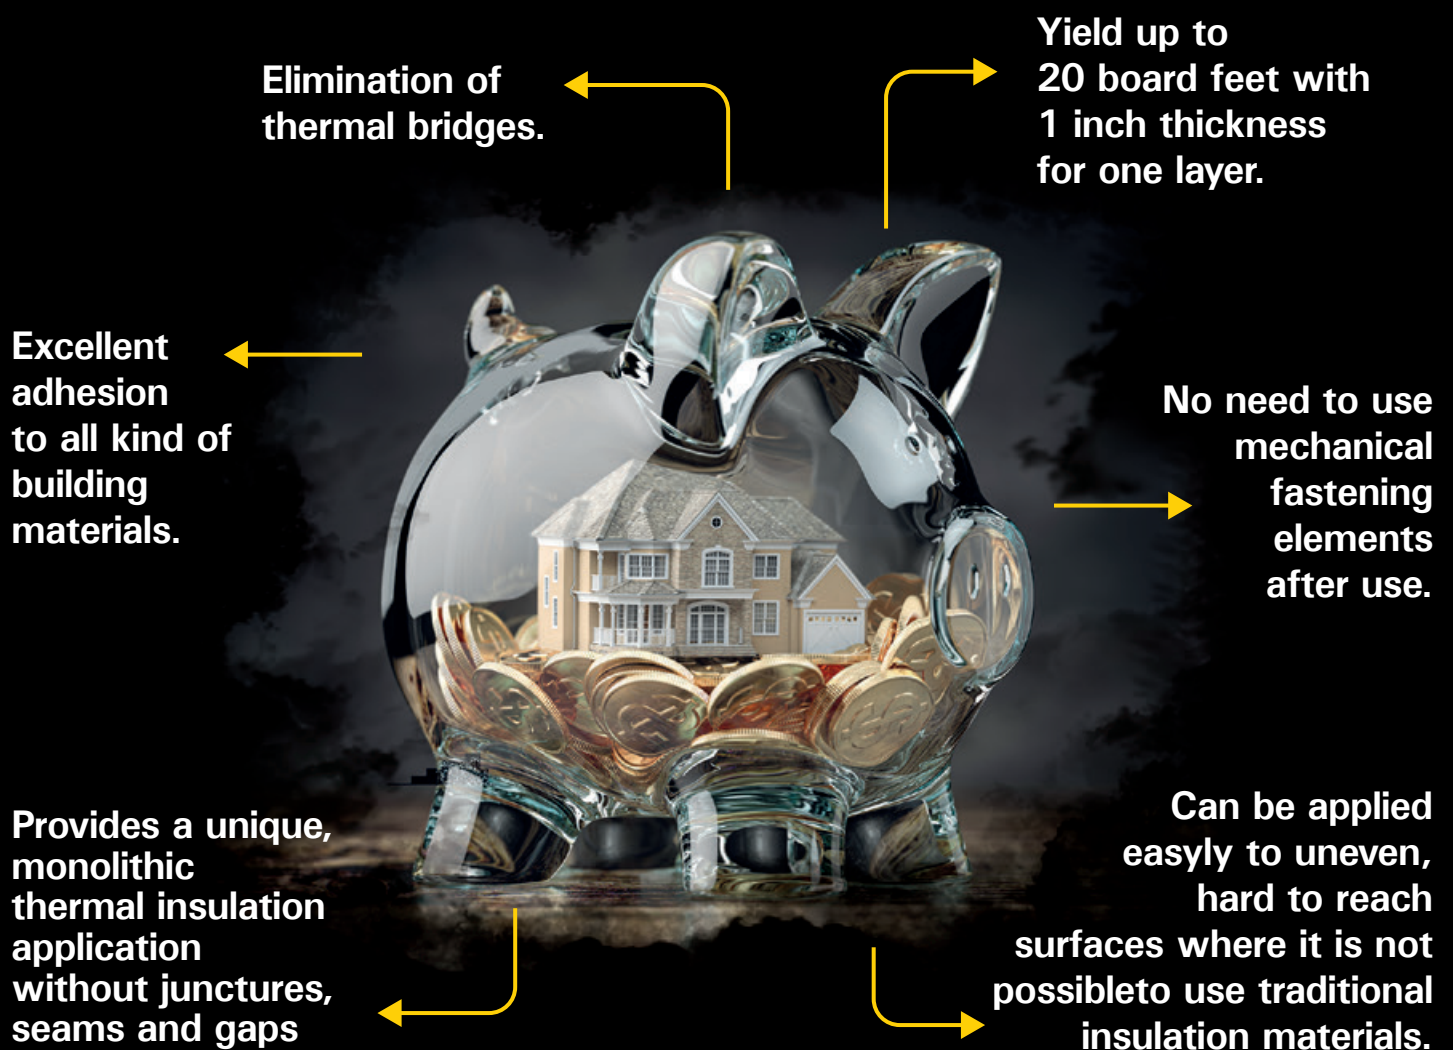

SAVE TIME



SAVE MONEY




SAVE HEAT



NOISE CANCELLING

EASY TO USE EXCELLENT ADHESION FOR ALL BUILDING MATERIALS

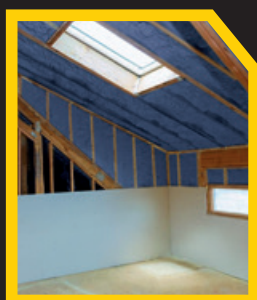

COVERS UP TO

20
BOARD

Feet / sq.ft.

With a can of
Spray Insulation Foam, insulation of an
area covers up to 20 board feet with the
thickness of 1 inch can be ensured.

SUITABLE FOR ALL BUILDING MATERIALS



Concrete



OSB Panel



AAC Block



Metal



Drywall



Brick & Stone

Excellent R-Value: 5.66 per inch and thermal insulation value 0.025W/(m.k)

YOU NO LONGER NEED THE OLD METHODS!



- Offers low purchasing and application cost in comparison with its numerous equivalent insulation products.
- You may apply by your own. It does not require professional support and expertise for application.
- Easy to transport and store. Does not result in additional transportation and warehousing costs.



STANLEY

www.STANLEYCHEM.com

contact@stanleychem.com

© 2022 STANLEY

Scan
QR code
for product
video.

